


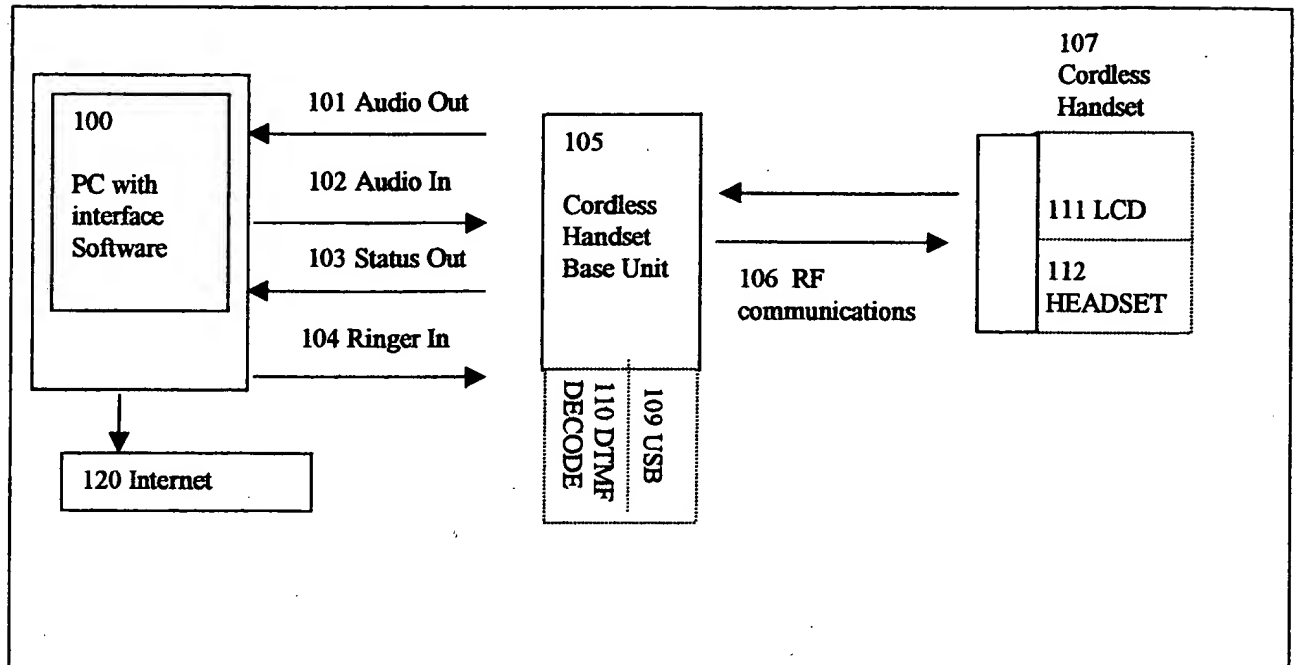
[illegible]

FIGURE 2

**Received call**

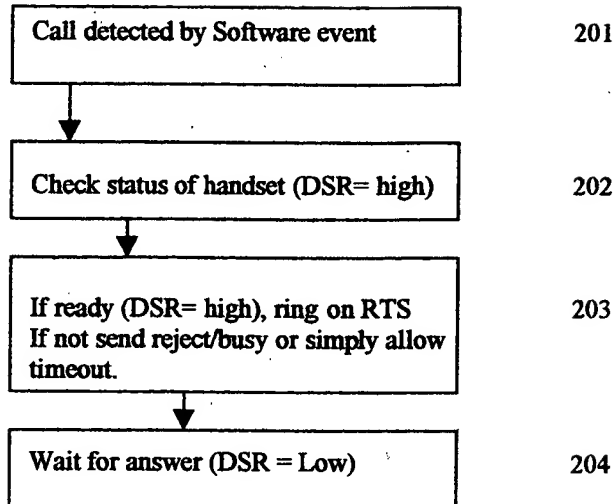

**200 Initial Setup Steps:**

1. Connect phone on a COM port
2. Connect Audio cables
3. Select default sound system mixer (if more than one.
4. Set volumes to 50% for Record Mic and Playback Wav , disable Playback Mic and Record Wav to prevent feedback.
5. Run Internet Telephony software to allow it to get control of the sound system
6. Run sample control program (fig 5)
7. Verify that program detects phone on com port and test ring it.
8. Choose Internet Telephony Service
9. Enable Dialer
10. Hit Talk button to play dialtone and trigger auto recovery if sound system is set up incorrectly (no default device).

**Outgoing Call**

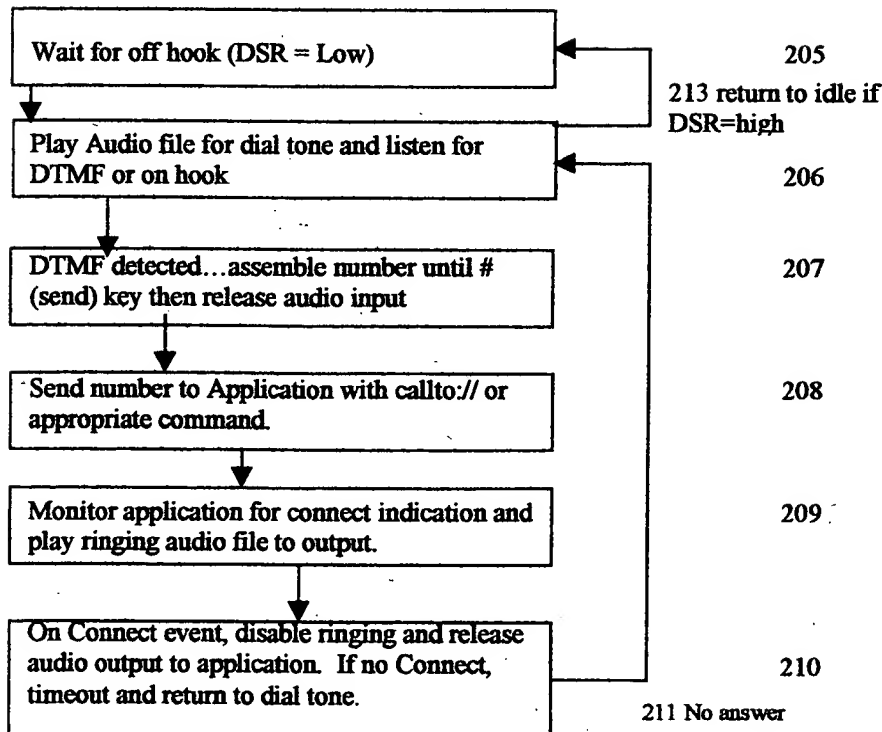


Figure 3


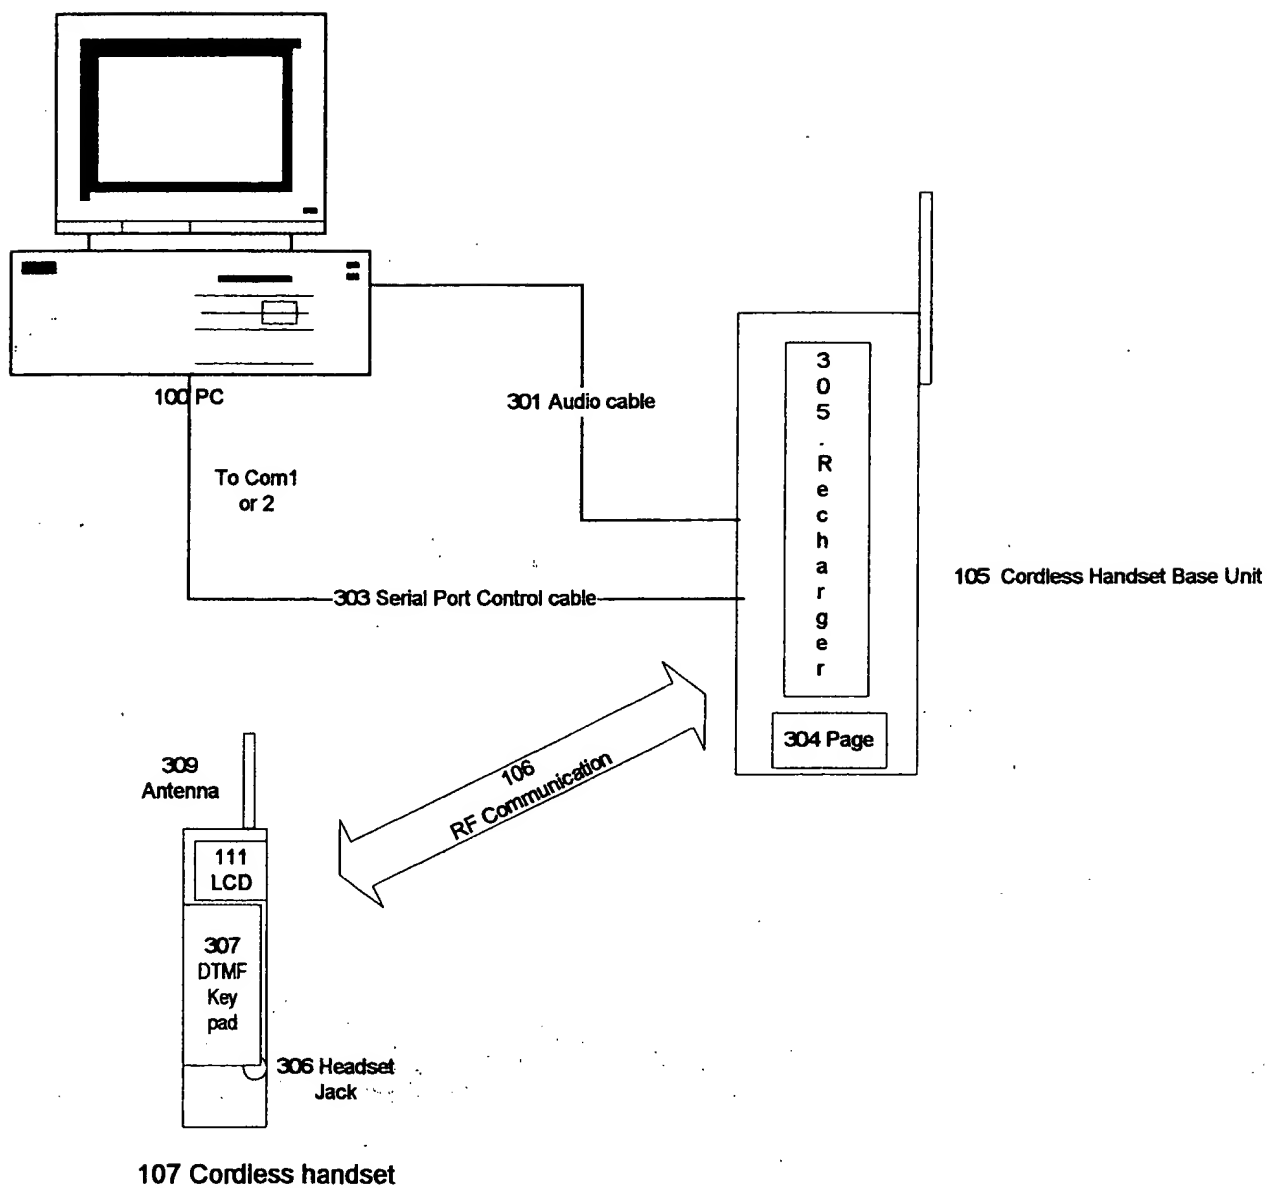


Figure 4 Simplified Block Diagram

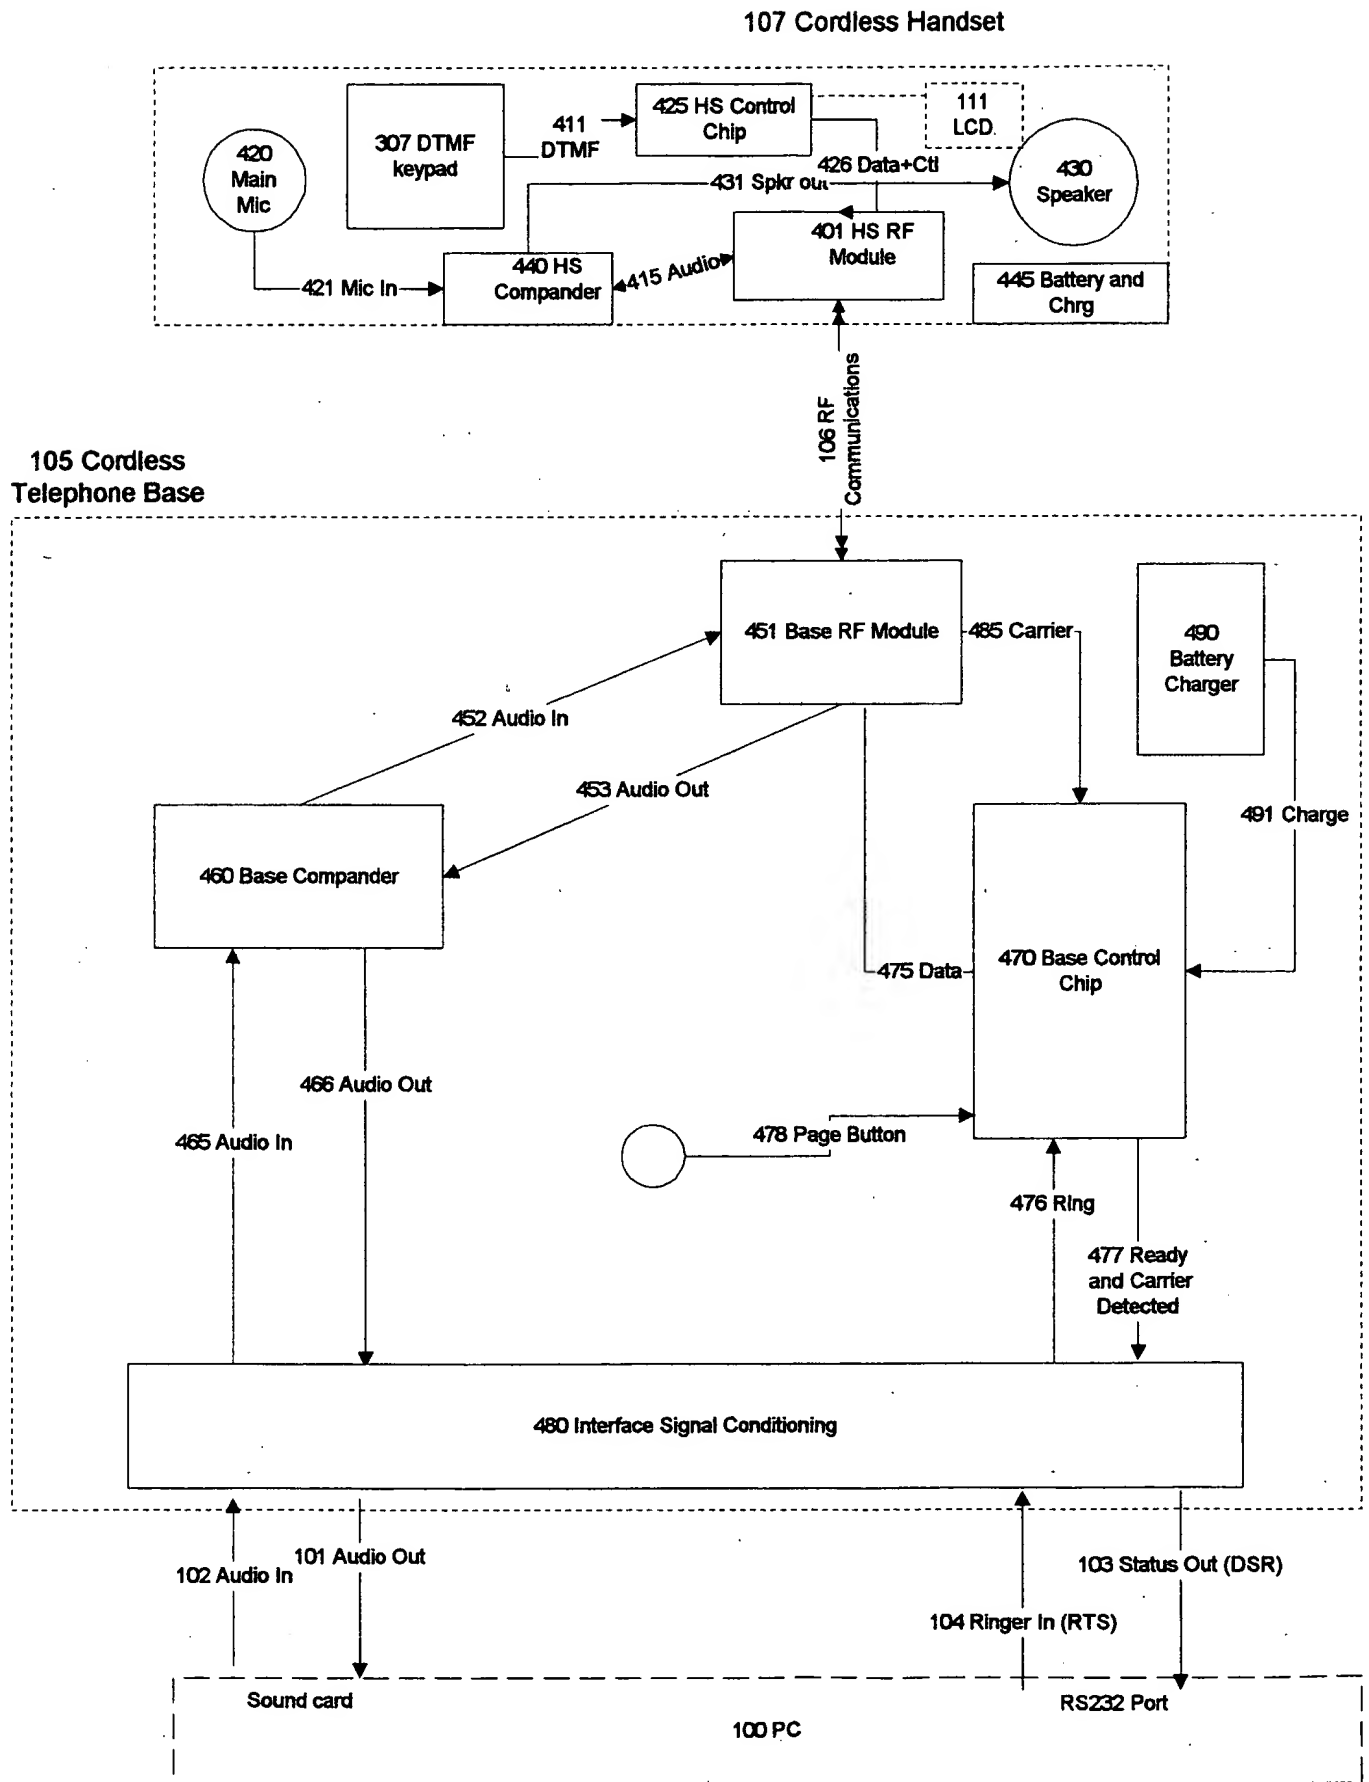

**INT900 dialer**

Your Internet Telephone Software (Dialpad, Pagoo, or MS Instant Messenger must be loaded, logged in, and on screen BEFORE you click the enable button!)

**Help**

1. Locate the INT900 by selecting com port 1 or 2 and trying to ring it. The Ring button will only be visible if a device is found on the selected port.

Phone on Com 1 or 2  Listening on com port 1 **Try To Ring It...**

2. Pick which service you have logged into

☒ **Dialpad** ☐ PhoneFree ☐ MS Instant Messenger with Net2Phone

3. Enable the Dialer

**Enable Tone Dialer** **Reset** **Enable**

**Tones Detected**  
410555121

**display**

**900 MHz**

**500 Port D**

**510 App.**

**520 Enable**

1990-1991

[illegible]

## Misc. (Types, Enums, Constants...)

## ' Errors used by ttLib

```
tteNoError == 0
```

**tteNotSupported**

## theWaveDeviceDidNotOpen

### tteBadParameter

**' Most ttLib functions return a success value**

**ttscFailure = 0**

## End Enum

## Enum `ttCallbackMethods`

**'PostMessage to a given window**

' SendMessage to a given window

## ' Call a function DIRECTLY FROM THE RECOGNIZER THREAD

' Used by `ttInitializeEx()`

## StructSize As Long

<b>CallbackMethod</b>	As ttCallbackMethods	'Desired form of callback'
-----------------------	----------------------	----------------------------

' If CB method is DirectFunction, this is a

**'Function pointer of a CallbackType function.**

' If CB method is Send/PostMessage, this is

' the target hWnd.

' If CB method is Send/PostMessage, this is the

' window message to send or itAutomatic.

' Noise gate level or ttAutomatic

' Number of 12.75ms sampling windows needed

' for tone or ttAutomatic

' Number of 12.75ms sampling windows needed

' for silence or ttAutomatic

' Signal to noise ratio or ttAutomatic

' Primary to harmonic ratio for rows or

```

        ' ttAutomatic
ColRatio As Long        ' Primary to harmonic ratio for columns or
        ' ttAutomatic
DeviceOverride As Long  ' Audio input device to use or ttAutomatic
End Type

```

---

```

' Interface functions

```

---

```

' You call Initialize() or InitializeEx() when you first load the DLL or
' when you want to change some of the parameters. They are NOT meant to
' be called while recognition is in progress. The results of calling them
' while recognition is in progress are undefined.
' The ttInitializeExInfo struct passed to InitializeEx() will be returned
' with all ttAUTOMATIC values replaced by their defaults. The struct can
' freed immediately.

```

```

Declare Function ttInitialize Lib "ttLib" (ByVal Method As ttCallbackMethods, ByVal CallbackInfo1 As
Long) As ttSuccessValue

```

```

Declare Function ttInitializeEx Lib "ttLib" (ttLibInitializeExInfo As ttInitializeExInfo) As ttSuccessValue

```

```

' Starts up recognition

```

```

Declare Function ttBeginRecognition Lib "ttLib" () As ttSuccessValue

```

```

' Stops recognition. Failing to call this is an easy way to crash your app.

```

```

Declare Function ttEndRecognition Lib "ttLib" () As ttSuccessValue

```

```

' Returns an error value.

```

```

Declare Function ttGetErrorVal Lib "ttLib" () As ttErrors

```

---

```

' This is the prototype to use for callbacks functions. With VB6, this is
' useless unless you really know what you're doing. With VB5, it should
' be a breeze.

```

```

' Sub CallbackProc(ByVal Char As Byte)

```

The following Communications constants are from win32api.txt:

---

```

'EscapeCommFunction values

```

```

Global Const SETXOFF = 1

```

```

Global Const SETXON = 2

```

```

Global Const SETRTS = 3

```

```

Global Const CLRRTS = 4

```

```

Global Const SETDTR = 5

```

```

Global Const CLRDTR = 6

```

```

Global Const RESETDEV = 7

```

```

Global Const GETMAXLPT = 8

```

```

Global Const GETMAXCOM = 9

```

```

Global Const GETBASEIRQ = 10

```

00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000

---

'Global variables & constants

Public CommPorts() As String  
Public PortExists As Boolean  
Public Com1PortInUse As Boolean  
Public Com2PortInUse As Boolean  
Public PortNumber As Integer  
Public PortOpen As Boolean  
Public NumberOfPorts As Integer

Public ValidPort As Boolean  
Public dtmf As String  
Public getting\_tone As Boolean

'API declares:

Declare Function PlaySound \_  
Lib "winmm.dll" \_  
Alias "PlaySoundA" \_  
(ByVal lpszName As String, ByVal hModule As Long, ByVal dwFlags As Long) As Long

Public Declare Function EscapeCommFunction \_  
Lib "kernel32" \_  
(ByVal nCid As Long, \_  
ByVal nFunc As Long) \_  
As Long

Public Declare Function timeGetTime \_  
Lib "winmm.dll" () \_  
As Long

---

Public Sub Delay(DelayInMilliseconds As Single)  
'Delay timer with approximately 1-msec. resolution.  
'Uses the API function timeGetTime.  
'Rolls over 24 days after the last Windows startup.  
Dim Timeout As Single  
Timeout = DelayInMilliseconds + timeGetTime()  
Do Until timeGetTime() >= Timeout  
DoEvents  
Loop  
End Sub

---

Public Sub ShutDown()  
'Close the port.  
If Form1.MSComm1.PortOpen = True Then  
Form1.MSComm1.PortOpen = False



End If  
End Sub

Private Const WM\_LBUTTONDOWN = &H202  
Public dialing As Boolean  
Public dialtoneplaying As Boolean  
Public talking As Boolean

---

Private Sub CallbackTarget\_MouseUp(Button As Integer, Shift As Integer, X As Single, Y As Single)  
' When the recognizer gets a valid tone, it sends a window message with  
' both the LPARAM and the WPARAM as the ASCII value of the key. Since we  
' specified WM\_LBUTTONDOWN as the message and CallbackTarget.hWnd as the window  
' in our call to ttInitializeEx() -- this MouseUp event ends up firing when  
' a key is recognized!  
' For a normal WM\_LBUTTONDOWN message, the X position of the mouse is in the  
' low word of the LPARAM. Since VB uses that for the X parameter... the  
' key's ASCII value is now in X! Note that CallbackTarget's ScaleMode is  
' vbPixels. If it was something else, VB would have multiplied the real  
' low word of LPARAM by something to make X (i.e., if ScaleMode = vbTwips,  
' we'd want to do txtKeys.SetText = Chr\$(X \ Screen.TwipsPerPixelX)). Don't  
' sweat it. Just make sure your callback.target's ScaleMode is vbPixels!

Status.SetStart = Len(Status.Text)  
Status.SetText = Chr\$(X)  
End Sub

---

Private Sub EnableDialer\_Click()

If PickMSIM.Value = False And PickDialpad.Value = False And PickPhoneFree.Value = False Then  
MsgBox "You must select a program first"  
Exit Sub  
End If

PortNumber = Text1.Text  
If Form1.MSComm1.PortOpen = True Then Form1.MSComm1.PortOpen = False  
Form1.MSComm1.CommPort = PortNumber  
If Form1.MSComm1.PortOpen = False Then Form1.MSComm1.PortOpen = True

---

'start capturing tones  
  
If ttBeginRecognition = ttscFailure Then  
MsgBox "Failed to start DTMF recognition! Is your sound system in use by another program?" &  
vbNewLine & "Error " & CStr(ttGetErrorVal), vbExclamation  
Exit Sub  
End If  
Status.Text = ""  
dialing = True  
If PickDialpad.Value = True Then Timer1.Enabled = True

007742260

If PickMSIM.Value = True Then Timer2.Enabled = True  
If PickPhoneFree.Value = True Then Timer3.Enabled = True  
EnableDialer.Enabled = False  
Command2.Enabled = False  
Text1.Enabled = False  
Text2.Text = "Listening on com port " & PortNumber

End Sub

---

Private Sub Command2\_Click()  
PortNumber = Text1.Text  
Call ringit  
Call ringit ' sometimes the detection circuit needs a second ring  
End Sub

---

Private Sub ringit()  
'rings the handset until answered  
If MSComm1.PortOpen = True Then MSComm1.PortOpen = False  
'Change Comm port here  
MSComm1.CommPort = PortNumber  
If MSComm1.PortOpen = False Then MSComm1.PortOpen = True  
Dim Commhandle As Long  
Commhandle = Form1.MSComm1.CommID

Do  
Dim Timeout As Single  
Timeout = timeGetTime() + 500  
Do  
RTSOn = SETRTS  
Success = EscapeCommFunction(Commhandle, RTSOn)  
Delay (25)  
RTSOn = CLRRTS  
Success = EscapeCommFunction(Commhandle, RTSOn)  
Delay (25)  
Loop While (timeGetTime() <= Timeout)  
Delay (1000)  
'Wait for off hook  
Loop While MSComm1.DSRHolding = True  
If MSComm1.PortOpen = True Then MSComm1.PortOpen = False  
End Sub

---

Private Sub Reset\_Click()  
'reset everything and stop timers  
ttEndRecognition  
If Form1.MSComm1.PortOpen = True Then Form1.MSComm1.PortOpen = False  
Call dialtone\_off  
Timer1.Enabled = False  
Timer2.Enabled = False  
Timer3.Enabled = False

```
EnableDialer.Enabled = True
Command2.Enabled = True
Delay (1000) 'give the phone a second to settle in case they just hung up
Call Text1_Change
End Sub
```

---

```
Private Sub Command4_Click()
    Dim htmlpath
    htmlpath = App.Path & "\index.html"
    frmBrowser.StartingAddress = htmlpath
    frmBrowser.Show
End Sub
```

---

```
Private Sub Form_Load()
    'set up state variables
    dialing = False
    dialtoneplaying = False
    talking = False
    Text1.Text = 1
    PortNumber = Text1.Text
    Call Text1_Change
```

---

```
'set up dtmf detector
Dim IEI As ttInitializeExInfo
With IEI
    .StructSize = LenB(IEI)

    .CallbackMethod = ttcmPostMessage

    ' CallbackInfo1 is the target window for window-based callbacks
    .CallbackInfo1 = CallbackTarget.hWnd

    ' CallbackInfo2 is the WM to send for window-based callbacks
    .CallbackInfo2 = WM_LBUTTONUP

    ' Use the defaults...
    .ColRatio = ttAutomatic
    .DeviceOverride = ttAutomatic
    .MinNoise = ttAutomatic
    .RowRatio = ttAutomatic
    .SignalToNoise = ttAutomatic
    .SilenceDuration = ttAutomatic
    .ToneDuration = ttAutomatic
End With

If ttInitializeEx(IEI) = ttscFailure Then
    MsgBox "Failed to initialize ttLib!" & vbNewLine & "Error " & CStr(ttGetErrorVal), vbExclamation
    Unload Me
    Exit Sub
End If
```

```
' ttInitializeEx will have filled in all the ttAutomatic values, so
```

' we can see what they are now if you uncomment the box below...

```
MsgBox "Tone duration is " & Format$(IEI.ToneDuration * 12.75, "#.##") & vbNewLine & _  
"Silence duration is " & Format$(IEI.SilenceDuration * 12.75, "#.##"), _  
vbInformation, "Info"
```

End Sub

---

Private Sub PickDialpad\_Click()

PickMSIM.Value = False

PickPhoneFree.Value = False

End Sub

---

Private Sub PickMSIM\_Click()

PickDialpad.Value = False

PickPhoneFree.Value = False

End Sub

---

Private Sub PickPhoneFree\_Click()

PickMSIM.Value = False

PickDialpad.Value = False

End Sub

---

Private Sub Text1\_Change()

' check for DSR on selected port to sense a device

'note that IR ports also give a positive response, it might not be the phone

On Error Resume Next

If Text1.Text = "" Then Exit Sub

If Text1.Text > 0 And Text1.Text < 3 Then PortNumber = Text1.Text

If Form1.MSComm1.PortOpen = True Then Form1.MSComm1.PortOpen = False

Form1.MSComm1.CommPort = PortNumber

If Form1.MSComm1.PortOpen = False Then Form1.MSComm1.PortOpen = True

If Form1.MSComm1.DSRHolding = True Then

Text2.Text = "Device found on port"

Command2.Visible = True ' display a test ring button

Else

Text2.Text = "Device not ready or not found on com port"

Command2.Visible = False

End If

If Text1.Text > 2 Then Text1.Text = 1

End Sub

---

Private Sub Timer1\_Timer()

If dialing = True And Form1.MSComm1.DSRHolding = False Then

'check to see if I should start dialtone

If dialtoneplaying = False And Status.Text = "" Then Call dialtone\_on

'wait for right number of digits, and kill dialtone on the first one

If Len(Status.Text) > 0 Then

Call dialtone\_off

If Len(Status.Text) > 9 Then

' recognition is ended







[illegible]

score	Noise Gate	Noise/Signal	Tone Duration	Silence Duration	Pri/Harmonic Ratio
0	0	1	1	1	0
0	450495	1	1	1	0
0	0	1	1	1	25
0	450495	25	1	1	0
0	450495	50	1	1	0
0	1000000	25	1	1	0
0	1000000	50	1	1	0
0	0	1	10	1	12
0	0	1	10	1	25
0	495050	12	5	1	0
0	495050	12	10	1	0
0	495050	12	1	5	0
0	495050	12	1	10	0
0	495050	12	1	1	12
0	495050	12	1	1	25
1	1000000	1	1	1	0
1	0	1	1	1	12
1	450495	1	1	1	25
1	0	1	5	1	25
1	0	1	1	5	25
1	0	1	10	10	0
1	0	1	1	10	12
1	0	1	1	10	25
2	0	1	1	5	0
2	0	25	10	1	0
2	1000000	1	10	1	0
2	0	1	10	5	0
3	0	25	1	1	0
4	450495	1	10	1	0
4	0	25	1	10	0
4	0	1	5	1	12
5	0	1	1	10	0
5	450495	1	1	1	12
5	0	50	1	10	0
6	0	25	1	5	0
6	0	25	1	1	25
6	0	1	1	5	12
6	0	50	10	1	0
7	1000000	1	1	1	12
7	0	50	1	1	12
7	0	50	1	1	25
8	0	50	1	1	0
8	0	1	5	1	0
8	0	25	1	1	12
8	0	1	5	10	0
8	0	50	5	1	0
9	0	1	10	1	0
9	0	1	5	5	0
9	1000000	1	5	1	0
9	1000000	1	1	5	0



9	1000000	1	1	10	0
9	1000000	1	1	1	25
9	0	50	1	5	0
10	450495	1	5	1	0
10	450495	1	1	5	0
10	450495	1	1	10	0
10	0	25	5	1	0

[illegible]

[illegible]

```
// -----
// Main.c - Murphy McCauley
// Sun, Oct 1 / 2000
// The interface and heart of ttLib
// -----

// -----
// Misc
// -----

// This is the main file
#define MAIN

// -----

// -----
// Includes
// -----

#include "ttLib.h"
#include "Main.h"
#include "DFT.h"
#include "Util.h"

#include <math.h> // For floor() (I think that's all...)
#include <process.h> // For threading
#include <mmsystem.h> // For audio

// -----

// -----
// Callback settings (File scope variables)
// -----

// This is a function pointer to the function to call when a key has been
// recognized. This function implements a callback behavior.
GotKeyType pGotKeyFunc;

// If the callback method is one that calls a function, this is a pointer to
// the function to call.
CallbackType pCallbackFunc;

// If the callback method is one that notifies via a window, this is the
// window that receives the notification.
HWND pCallbackWindow;

// If the callback method is one that notifies via a window, this is the
// window message to send.
int pCallbackMessage;
```

```

// -----

// -----
// Misc variables (File scope variables)
// -----

// WAVEHDRs for the chunks
WAVEHDR    pWaves[NUM_CHUNKS];

// Pointer to the entire audio data buffer (for all chunks)
short * pWaveData;

// Pointers within pWaveData -- one for each chunk
short * pChunkData[NUM_CHUNKS];

// Handle of the audio input device
HWAVEIN phDev;

// The waveform format
WAVEFORMATEX pFormat;

// When TRUE, the decoding loop will exit
volatile BOOL pQuitNow = FALSE;

// Handle of the recognizer thread
HANDLE phThread;

// Audio device to open
UINT pAudioDevice = WAVE_MAPPER;

// Translates a row and column into a key
static char pKeys[4][4] = {{ '1', '2', '3', 'O'}, // O - Flash Override (FO/A)
                           { '4', '5', '6', 'F'}, // F - Flash (F/B)
                           { '7', '8', '9', 'I'}, // I - Immediate (I/C)
                           { '*', '0', '#', 'P'} }; // P - Priority (P/D)

// -----

// -----
// Recognizer settings (File scope variables)
// -----

// This is a noise gate to stop excessively noisy signal from being
// considered as a tone candidate.
int pMinNoise = DEFAULT_MIN_NOISE;

// This is the number of sampling intervals that must pass until
// a key is considered pressed (currently a 12.75ms sampling interval
// is hard coded). I suggest 3 -- 3 * 12.75 = 38.25
int pToneDur = DEFAULT_TONE_DURATION;

// This is the number of sampling intervals that must pass between
// keys (currently a 12.75ms sampling interval is hard coded).
// I suggest 3 -- 3 * 12.75 = 38.25
int pSilenceDur = DEFAULT_SILENCE_DURATION;

```

```
// This determines how much stronger the detected tones must be
// compared with the rest of the signal. Likely range is 10 - 50.
int pSignalToNoise = DEFAULT_SIGNAL_TO_NOISE;
```

```
// These are the ratio between the primary tone and its harmonic.
// The higher they are, the stronger the primary tone must be in
// comparison, which will make the thing less likely to misfire.
// Likely range is 0 - 25. In my testing, most sources are noisy
// enough to throw this off rather easily for at least on frequency.
// I suspect this is due to the tone generators.
int pRowRatio = DEFAULT_ROW_RATIO;
int pColRatio = DEFAULT_COL_RATIO;
```

```
// -----
```

```
// -----
// Misc. internal functions
// -----
```

```
int CalcNumSamples(double MS, int Rate) {
    double T;
    T = MS * (Rate / 1000.0);
    if (floor(T) < T) {
        return (int)(floor(T) + 1);
    } else {
        return (int)floor(T);
    }
}
```

```
unsigned __stdcall ThreadProc (LPVOID Dummy) {
    BOOL TempB;

    TempB = Recognize();

    if ( (TempB == FALSE) && (gLastError == tteNoError) ) {
        SetError(tteUnknown);
    }

    _endthreadex(TempB);
    return TempB; // Just for style
}
```

```
// -----
```

```
// -----
// Callback handling functions
// -----
```

```
// These functions (xCB()) implement callback methods
void SendMessageCB (char Key) {
    SendMessage(pCallbackWindow, pCallbackMessage, Key, Key);
}
void PostMessageCB (char Key) {
    PostMessage(pCallbackWindow, pCallbackMessage, Key, Key);
}
```

[illegible]**BOOL SetCallback(ttCallbackMethods Method, int CB) {**

}

---

---

}

```

if (Info->StructSize != sizeof(ttInitializeExInfo)) {
    SetError(tteNotSupported);
    return FALSE;
}
if (!SetCallback(Info->CallbackMethod, Info->CallbackInfo1)) {
    return FALSE;
}

pCallbackMessage= autosetp(&Info->CallbackInfo2, DEFAULT_CALLBACK_MESSAGE);

pMinNoise          = autosetp(&Info->MinNoise,          DEFAULT_MIN_NOISE);
pToneDur           = autosetp(&Info->ToneDuration,      DEFAULT_TONE_DURATION);
pSilenceDur        = autosetp(&Info->SilenceDuration,    DEFAULT_SILENCE_DURATION);
pSignalToNoise     = autosetp(&Info->SignalToNoise,     DEFAULT_SIGNAL_TO_NOISE);
pRowRatio          = autosetp(&Info->RowRatio,          DEFAULT_ROW_RATIO);
pColRatio          = autosetp(&Info->ColRatio,          DEFAULT_COL_RATIO);

pAudioDevice       = (UINT)autosetp(&Info->DeviceOverride, DEFAULT_DEVICE);

return TRUE;
}

```

```

BOOL EXPORT ttInitialize (ttCallbackMethods Method, int CB) {
    SetError(tteNoError);

    if (!SetCallback(Method, CB)) {
        return FALSE;
    }

    pCallbackMessage = DEFAULT_CALLBACK_MESSAGE;
    pMinNoise        = DEFAULT_MIN_NOISE;
    pToneDur         = DEFAULT_TONE_DURATION;
    pSilenceDur      = DEFAULT_SILENCE_DURATION;
    pSignalToNoise   = DEFAULT_SIGNAL_TO_NOISE;
    pRowRatio        = DEFAULT_ROW_RATIO;
    pColRatio        = DEFAULT_COL_RATIO;

    pAudioDevice     = DEFAULT_DEVICE;

    return TRUE;
}

```

```

BOOL EXPORT ttBeginRecognition () {
    int ThreadID;

    if (phThread) {
        SetError(tteWrongState);
        return FALSE;
    }

    pFormat.wFormatTag = WAVE_FORMAT_PCM;
    pFormat.nChannels = 1;
    pFormat.nSamplesPerSec = 11025; // 11kHz
    pFormat.wBitsPerSample = 16;
    pFormat.nBlockAlign = (pFormat.nChannels * pFormat.wBitsPerSample) / 8;
    pFormat.nAvgBytesPerSec = pFormat.nBlockAlign * pFormat.nSamplesPerSec;
}

```

00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000

[illegible]

---